



1341HS



Slot is suitable for BAL Clip Types 6 and 7


Length (mm)	50	100	150	200		
Deg C/W	2.50	1.50	1.00	0.85		

1380HS

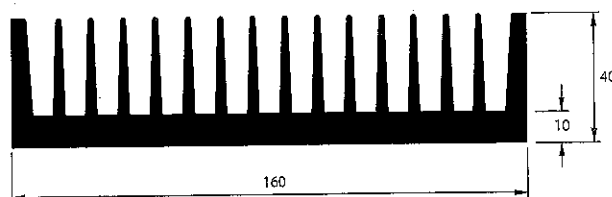


Length (mm)	50	100	150	200	300	
Deg C/W	0.90	0.60	0.45	0.39	0.34	

1346HS

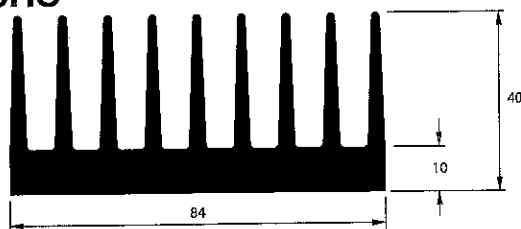


Length (mm)	50	100	150	200	300	
Deg C/W	2.90	1.80	1.45	1.20	1.10	

1383HS

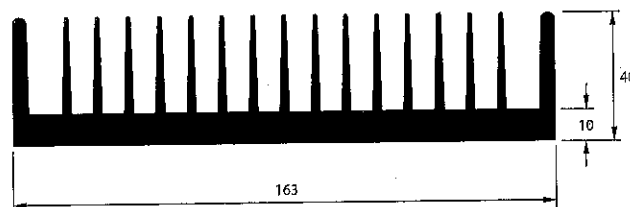


Length (mm)	50	100	150	200	300	
Deg C/W	0.90	0.60	0.48	0.39	0.34	

1350HS

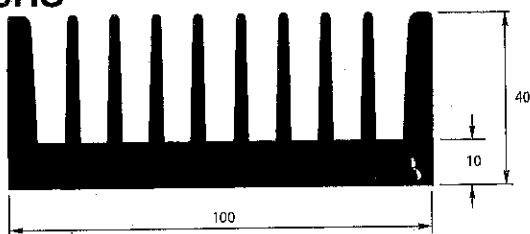


Length (mm)	50	100	150	200	300	
Deg C/W	2.40	1.50	1.20	1.00	0.90	

1387HS

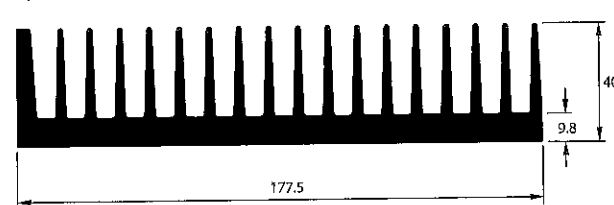


Length (mm)	50	100	150	200	300	
Deg C/W	0.84	0.55	0.45	0.38	0.32	

1360HS

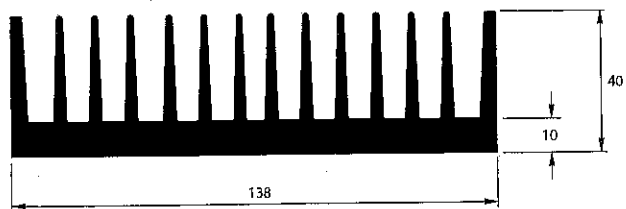


Length (mm)	50	100	150	200	300	
Deg C/W	2.10	1.30	1.05	0.90	0.80	

1400HS

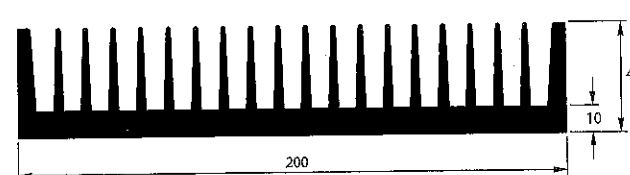


Length (mm)	50	100	150	200	300	
Deg C/W	0.80	0.52	0.40	0.34	0.30	

1372HS

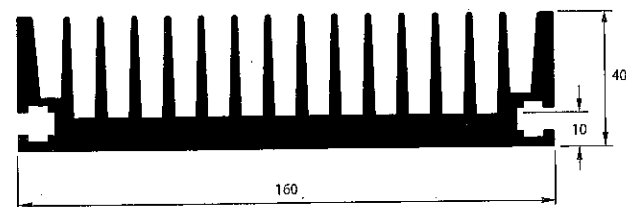

Length (mm)	50	100	150	200	300	
Deg C/W	0.90	0.60	0.45	0.39	0.34	

1425HS

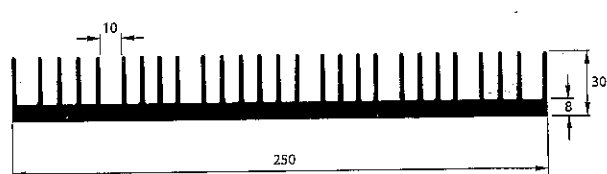

Length (mm)	50	100	150	200	300	
Deg C/W	0.65	0.50	0.42	0.38	0.34	